

CIS

STRAIGHT GUIDE PILLAR

FÜHRUNGSSÄULE | COLONNA LISCIA

~ DIN 9825 / ~ ISO 9182-2




Material: 1.7131
Hardness: 61÷63 HRC
Execution: fine ground

STOCK

3D-CAD



HOW TO ORDER
CIS * D1 * L (CIS1590)

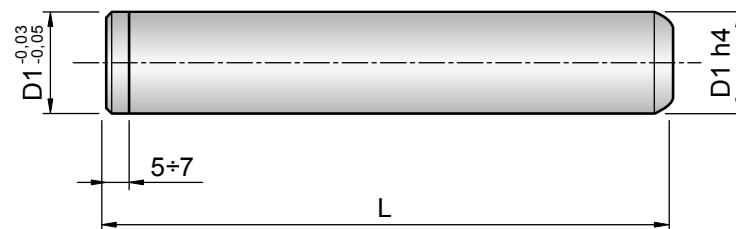

D1	L																																					
	90	100	112	120	125	130	140	150	160	170	180	190	200	210	220	224	230	240	250	260	270	280	300	315	320	350	355	360	400	450	500	600	700	800				
15 - 16	•	•	•		•		•		•		•		•			•			•																			
18				•		•	•	•	•	•	•	•	•																									
19		•	•	•	•	•	•	•	•	•	•	•	•			•			•																			
20		•	•		•		•		•		•		•			•			•																			
24 - 25					•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•		•	•	•							
30 - 32					•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•		•	•	•							
38									•		•		•			•			•			•		•			•		•	•	•							
40									•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•							
42										•	•	•	•	•	•			•	•	•	•	•	•	•			•	•	•									
48												•	•			•			•			•		•			•		•	•	•							
50											•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•							
52											•	•	•	•	•			•	•	•	•	•	•	•	•	•	•		•									
60																			•			•		•			•		•	•	•							
63												•		•				•	•	•			•	•	•	•		•	•	•	•	•						
80																							•	•	•	•		•	•	•	•	•	•	•	•			