

BEAG


DEMOUNTABLE BUSH FOR BALL CAGE

KUGELFÜHRUNGSBUCHSE MIT BUND | BUSSOLA ESTRAIBILE PER GABBIA A SFERE



ISO 9448-7



Material: 1.7131 Hardness: 61÷63 HRC Execution: inner diameter honed; D3 fine ground	STOCK	3D-CAD 	HOW TO ORDER BEAG * D1 * - * TYPE (BEAG19-7)
--	-------	------------	---

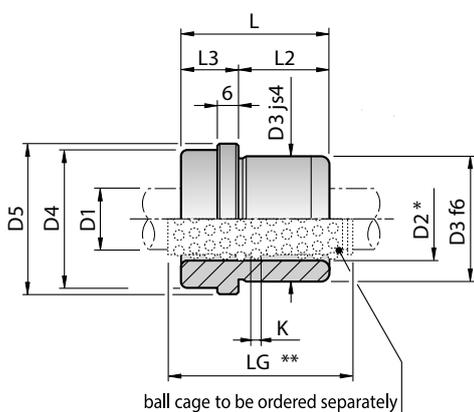

TYPE 7

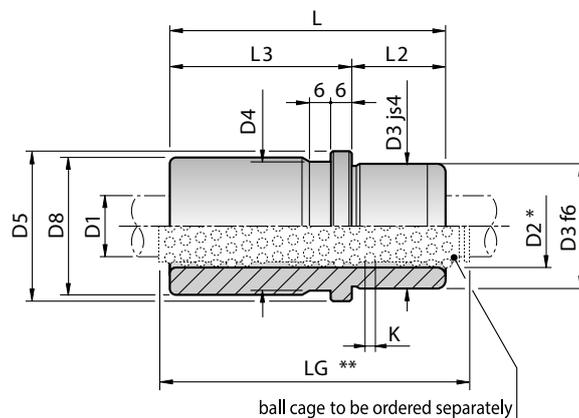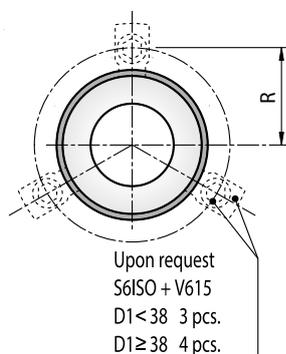

TYPE 4 - 5 - 6 - 9

* $D2 = D1 + 2K$

** Suggested length for ball cage

D1	D3	D4	D5	D8	R	L	L2	L3	LG **	K	TYPE
19 - 20	32	32	40	---	26	35	23	12	45	3	7
				39		43		20	56		6
				---		59		36	71		4
24 - 25	40	40	48	---	30	35	30	12	45	3	7
				46		55		25	71		9
				---		59	36	95	6		
				---		79	56	---	4		
30 - 32	48	48	56	---	33,5	80	30	50	95	3	5
				42		42		12	56		7
				---		69	37	32	80		9
				---		75	30	45	95		6
38 - 40	58	58	66	---	38,5	93	37	63	120	4	4
				---		56		120	5		
				---		52	37	15	63		7
				---		79	47	32	95		9
				---		82	37	45	105		6
48 - 50	70	70	80	---	45,5	108	37	71	120	4	4
				---		110		47	63		140
				---		65	47	18	80		7
				---		96	60	36	120		9
				---		97	47	50	120		6
60 - 63	85	85	95	---	53	127	60	80	140	6	4
				---		131		71	160		5
				---		80		20	95		7
				---		116		56	140		6
80	105	105	118	---	64,5	150	60	90	160	6	4
				---		80		20	120		7
				---		120		60	140		6
				---		150		90	160		4